

We Project Your Vision.



Vivid Colors, Vivid Life

SHORT THROW

76" @ 1 METER . 100" @ 1.3 METER

D930TX



JAVES

D930TX

High Stability

new lamp increased stability



Every user realizes that light bulb is one of the significant part of projector. Lamp life and projection quality will be influenced seriously by using flaw lamp. Vivitek Technology co-operate with Osram, world's top lamp manufacturer, develops new generation high efficient lamp last for up to 4,000 hours in Eco mode yet remains high stability.



High Brightness Are you tired of dim image? excellent improved image with high brightness



Market demand for high brightness increases gradually, the benefit from high brightness can achieve better result if the presenter wants eye contact with the audience while keeps ambient light on.



Filter Free

Say NO to the anti-dust filter
no anti-dust filter is required



Unlike other technology based projector with anti-dust filter which optics device is exposed in the air that causes temperature increment. However, DLP based projector has the congenital superiority in against dust aspect. Vivitek D9 series has sealed pure metal optics engine, which keeps filter free, and more durable in comparison with plastic components

Easy Lamp Replacement

sliding top cover: Convenient top loading allows for quick and easy lamp replacement.



Stunning picture quality

VividWheel III•enhanced Color Reproduction



- Improve color reproduction, Enabled Video AGC (Automatic Gain Control for Video Source
- With enabled automatic gain control, you will enjoy an essentially constant output signal from an electronic circuit despite variations in the strength of the input signal



Saving Time, Off & Go!

Full Connectivity


additional HDMI, RJ45



Vivitek Technology has developed new education & conference's Projector, in addition to mainstream connectivity, with RJ45 network control and HDMI V1.3 to satisfy customer demand of new Full HD content

Wide Angle

Space limited solution



Big Screen ←→ Short Distance

The D930TX allows you to project larger images from shorter distances. An image shot onto a 100-inch screen can be achieved from a distance of about only 1.3M (4.3 feet). D930TX is an ideal for the space limited smaller conference room or class room.

MODEL : D930TX

Model	D930TX
Display Type	TIDMD 0.55" XGA
Resolution	XGA 1024 x 768 Native
Weight	3.6kg (7.91BS)
Projection distance	0.5 meters ~ 5 meters
Projection screen size	38" ~ 380"
Projection lens	Manual Focus
Vertical keystone correction	±15 degrees
Projection methods	Fronts, Rear, Desktop, Ceiling(Rear, Front)
Data compatibility	IBM PC or compatibles(VGA, SVGA, XGA, SXGA, UXGA), Mac
SDTV / EDTV / HDTV	480i, 576i, 480p, 576p, 720p, 1080i, 1080p
Video compatibility	NTSC, PAL, SECAM
H-Sync	15, 30 - 80kHz
V-Sync	43 - 87 Hz
Safety certification	FCC-B, UL, Cul, CB,CE,CCC, EK , PCT, PSB
Operation temperature	5 ~ 35°
Dimensions	335 mm (W) 102mm (H) x 256mm (D)
AC Input	AC Universal 100 ~ 240 , Typical @ 110VAC (100 ~ 240) ±10%
Power consumption	350W
Stand By	< 1 watt
Lamp	280W
Audio speaker	3W mono speaker
Input Terminals	VGA x 2
	S-VGA x 1
	Composite Video x 1
	HDMI x 1
	RCA stereo x 1
Output Terminals	Mini-jack stereo x 1
	VGA x 1 (Loop Thru only for VGA IN -1)
	Mini-jack stereo x 1
Control Terminals	RS - 232C
	RJ45
Security	USB(type B)
	Kensington lock

Specification subjects to change without notice.

Environmental Protection




RoHS COMPLIANT A mission from Vivitek

Vivitek Technology always pays attention to the environmental protection & energy saving. The D9 contains following parts that is RoHS compliant:

- Lead-free solder : used for soldering all parts including circuit component electronics
- Lead-free glass: used for the lens
- Recycled paper: used in the user manuals and packing cartons
- Hi-efficiency power switching: reduces power consumption
- Less than 1w power consumption in standby mode, conforms to the
- American Environmental Protection Bureau to lead the advocate in view of Electronic Products Energy Saving Plan

Projection Distance vs. Projection Size

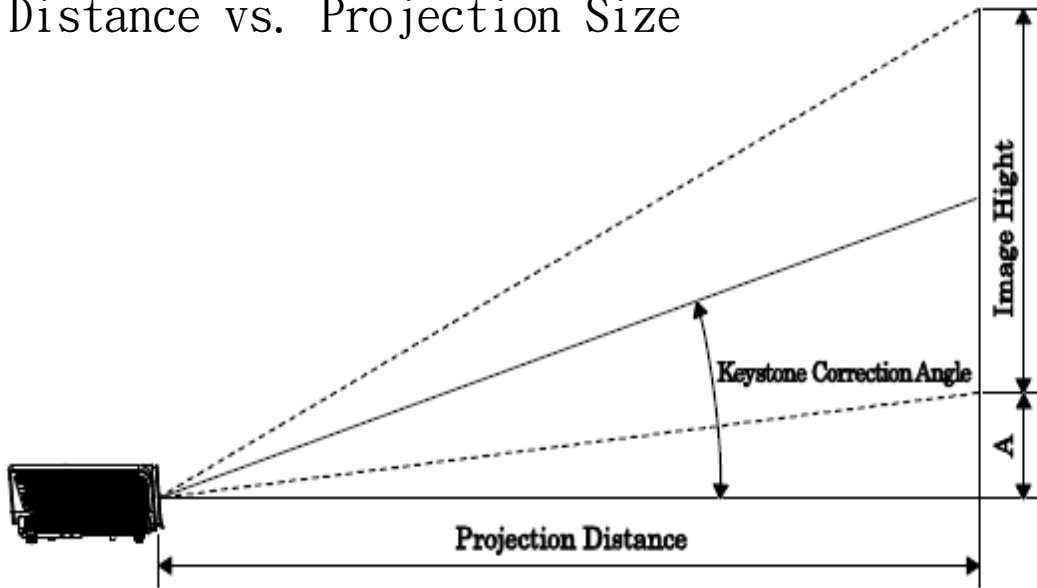

Projection Distance and Size Table

D930TX	TELE			
Distance(m)	0.53	1.05	1.32	3.95
Diagonal(inches)	40	80	100	300
Keystone(degree)	34.9	34.9	34.9	34.9
Image Height(mm)	609.6	121.2	1524	4572
Image Width(mm)	812.8	1625.6	2032	6096
A(mm)	62.8	125.6	157	470

JAVES

Projection Products

www.javesprojector.com

Tel: (852) 2887 5151

Fax: (852) 2503 1144

e-mail: jng@javesprojector.com

Address: Room 207, 2/F., Block B, Seaview Estate, Watson Road, North Point, Hong Kong.