

# JAVES

Projection Products



## D825 series

From Vivitek DLP® Projectors.




SVGA and XGA  
2600 lms

- Improved Vivid Color Wheel
- Technology provides outstanding vivid color suit for all application
- True multi-purpose model for office, school, or home use
- Rapid start and cool down
- Up to 3,000 hours lamp life time for extended use



# D8 Series

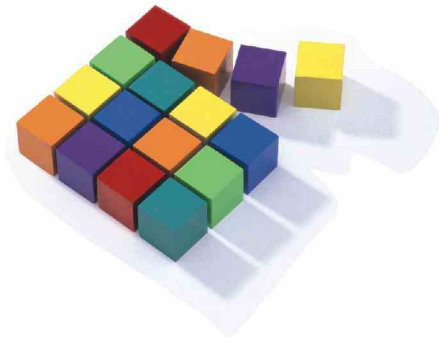

## High Brightness

Up to 2,600 lumen suitable for different application including big conference room

## Rapid Start-up

Quick start, no need to wait for the projector to warm up

## Instant Shut-Down

Instant power down, no waiting period, convenient to move to next business meeting

## Super Low Fan Noise

Super low noise operation at 28 dB (eco mode) yet no compromise to high brightness

## Advanced Peripheral Test

Hassle free peripheral test make sure all function is workable

## Auto Power On/ Power Off

User friendly auto power on & auto power off can be set up within selected period of time

## Vivid Color Management

Up to 7 individual color enhancement program enable user set up desired color image



## Products Specification:

	D825MS	D825MX
Display Technology	0.55" 1-Chip DMD	
Resolution	Native SVGA 800 x 600	Native XGA 1024 x 768
Brightness	2600 Lumens	
Contrast Ratio	2200:1	
Zoom & Focus	Fixed Zoom & Manual Focus	Manual Zoom & Manual Focus
Lens Throw Ratio	Fixed	1.93 ~ 2.16
Projection Screen Size	23"-300"	
Remote Control	Fully Featured IR Remote with Laser Pointer and Mouse	
Lamp	180W	
Aspect Ratio	Native (4:3) & Compatibility (16:9)	
PC Compatibility	VGA, VXGA, SVGA, XGA, SXGA, Macintosh	
Video Compatibility	EDTV (480p), HDTV (576i/p, 720p, 1080i), NTSC/NTSC 4.43, PAL B/G/H/I/M/N 60, SECAM	
Input Terminals	VGA (15pin D-Sub) x 1, Composite Video (RCA x 1), S-Video (Mini DIN) x 1, Audio Mini-Jack x 1	
Output Terminals	VGA (15pin D-Sub) x 1	
Communication Terminals	USB (Service), RS-232C x 1	
Keystone Correction	Vertical (+/- 15 degree)	
Fan Noise Level	32 dB (Standard Mode), 30dB (Eco-Mode)	
Audio Speaker	1W Mono	
Projection Method	Front, Rear, Table Top and Ceiling Mount	
Dimensions (w X H X D)	11" x 8" x 3.5" (280x205x96mm)	
Weight	5.73 lbs (2.6Kg)	
Power Supply	AC 100-240V	
Power Consumption	230W (STD), <5W Standby Power	
Accessory	AC Power cord, VGA-VGA cable, User Manual (CD), Remote Control, Carrying Case	
Osd Language	English/French/German/Spanish/Korean/Portuguese/Simplified Chinese/Traditional Chinese	

## Various I/O connectivity



**JAVES**  
Projection Products

Room 207, 2/F., Block B, Seaview Estate, Watson Road, North Point, Hong Kong.

Tel: (852)28875151 Fax: (852)25031144 E-mail: jng@javesprojector.com