

JAVES

Projection Products



D832MX

From Vivitek DLP® Projectors.



SVGA and XGA
2600 lms

- Improved Vivid Color Wheel
- Technology provides outstanding vivid color suit for all application
- True multi-purpose model for office, school, or home use
- Rapid start and cool down
- Up to 3,000 hours lamp life time for extended use



D832Series



High Brightness

Up to 3,200 lumen suitable for different application including big conference room

Rapid Start-up

Quick start, no need to wait for the projector to warm up

Instant Shut-Down

Instant power down, no waiting period, convenient to move to next business meeting

Super Low Fan Noise

Super low noise operation at 28 dB (eco mode) yet no compromise to high brightness

Advanced Peripheral Test

Hassle free peripheral test make sure all function is workable

Auto Power On/ Power Off

User friendly auto power on & auto power off can be set up within selected period of time




Vivid Color Management

Up to 7 individual color enhancement program enable user set up desired color image

Projection Distance

Screen size (inch)	Projection Distance Tele (M)	Height (M)	Screen size (inch)	Projection Distance Wide (M)	Height (M)
30	1.32	0.46	40	1.57	0.61
80	3.51	1.22	80	3.14	1.22
100	4.39	1.52	100	3.92	1.52
120	5.27	1.83	120	4.71	1.83
150	6.58	2.29	150	5.88	2.29
200	8.78	3.47	200	7.84	3.47
300	13.17	5.21	300	11.77	5.21

The above numbers are approximate, and may be slightly different from the actual measurements

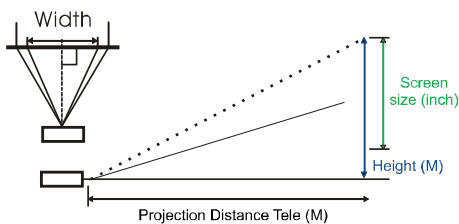

Products Specification:

Model	D832MX
Display Technology	0.55" 1-Chip DMD
Resolution	Native XGA 1024 x 768
Brightness	3200 Lumens
Contrast Ratio	2200:1
Zoom & Focus	Manual Zoom & Manual Focus
Lens Throw Ratio	1.93-2.16
Projection Screen Size	23"-300"
Remote Control	Fully Featured IR Remote with Laser Pointer and Mouse
Lamp	230W
Aspect Ratio	Native (4:3) & Compatibility (16:9)
PC Compatibility	VGA, VXGA, SVGA, XGA, SXGA, Macintosh
Video Compatibility	EDTV (480p), HDTV (576i/p, 720p, 1080i), NTSC/NTSC 4.43, PAL B/G/H/I/M/N 60, SECAM
PC Input Terminals	RGB (D-Sub) x 1, Composite Video (RCA x 1), S-Video (Mini DIN) x 1, Audio Mini-Jack x1
Output Terminals	RGB (D-Sub) x 1
Communication Terminals	USB (Service), RS-232C x 1
Keystone Correction	Vertical (+/- 15 degree)
Fan Noise Level	28dB (Eco-Mode), 32 dB (Standard Mode)
Audio Speaker	1W Mono
Projection Method	Front, Rear, Table Top and Ceiling Mount
Dimensions (w X H X D)	11"x8"x3.5"
Weight	5.7 lbs
Power Supply	AC 100-240V
Power Consumption	290W, <5W Standby Power
Accessories	AC Power cord, VGA-VGA cable, User Manual (CD), Remote Control, Batteries for Remote, Carrying Case, Lens Cap
Osd Language	English/French/German/Italian/Spanish/Korean/Simp. Chinese/Trad.Chinese /Russian/Czechoslovak/Portuguese/Polish/Swedish/Greek/Dutch/Danish /Finnish/Turkish/Arabic/Hungarian

* Specifications are subject to change without prior notice.

Various I/O connectivity



JAVES
Projection Products

Room 207, 2/F., Block B, Seaview Estate, Watson Road, North Point, Hong Kong.

Tel: (852)28875151 Fax: (852)25031144 E-mail: jng@javesprojector.com